


SPK

Panel Mounted Speaker

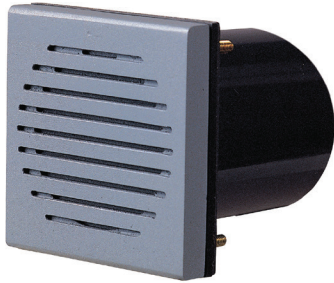

SPK

SPK Max 85dB, Panel Mounted Speaker

- General compatibility by adopting general equipment (62×62mm) mount holes
- Allowing volume control without dismantling the device
- Various sound patterns such as warning sound, melodies, and alarms can be chosen depending on the message use case
- Wiring terminal on the back side of the product
- Materials : ABS
- Sound volume : Max 85dB at 1m
- Ambient operating temperature : -25°C to +50°C
- Protection rating : IP23
- Certificates : CE Compliant

| Model number | Sound Type | Pre-recorded Sound | | | Voltage/ Current | Certificate | Weight |
|--------------|---------------|--------------------|-------------------------|------|--|------------------|------------------------|
| | | Ch | Sound Pattern | dB | | | |
| SPK | WS-5 Warnings | 1 | Fire.A-ANG | 85dB | DC12V / 0.288A DC24V / 0.155A AC110V / 0.036A AC220V / 0.018A | CE DC24V only | DC-0.19kg AC-0.21kg |
| | | 2 | Emergency WA-U(Yelp) | 85dB | | | |
| | | 3 | Ambulance PI-PO(Hi-low) | 85dB | | | |
| | | 4 | Machinery Fault | 85dB | | | |
| | | 5 | High Expansion | 83dB | | | |
| | WM-5 Melodies | 1 | Sweet Home | 85dB | | | |
| | | 2 | For Elise | 85dB | | | |
| | | 3 | Cuckoo's Waltz | 85dB | | | |
| | | 4 | Piano Sonata | 85dB | | | |
| | | 5 | Turkish March | 85dB | | | |
| | WA-5 Alarms | 1 | Beep Intermittent | 83dB | | | |
| | | 2 | Door Chime | 83dB | | | |
| | | 3 | Phone Ring | 85dB | | | |
| | | 4 | PI.PI.PI Short | 85dB | | | |
| | | 5 | Tripping Beat | 85dB | | | |




Terminal box for power and sound (back side)



Technical Diagram

(Units : mm)

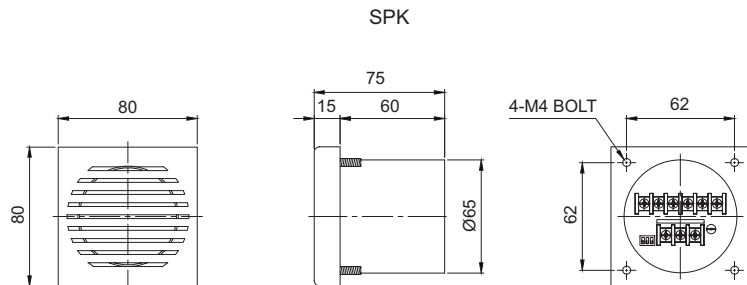

Ordering Specification

| | | | | |
|----------------|---|---|---|--|
| SPK | - | WM | - | 220 |
| [Model number] | | [Sound] | | [Voltage] |
| • SPK | | • WS-Warning • WM-Melody • WA-Alarm | | • 12-DC12V • 24-DC24V • 110-AC110V • 220-AC220V |



Wiring Instructions

